


# Sealaqua

## Polyurethane floor seal

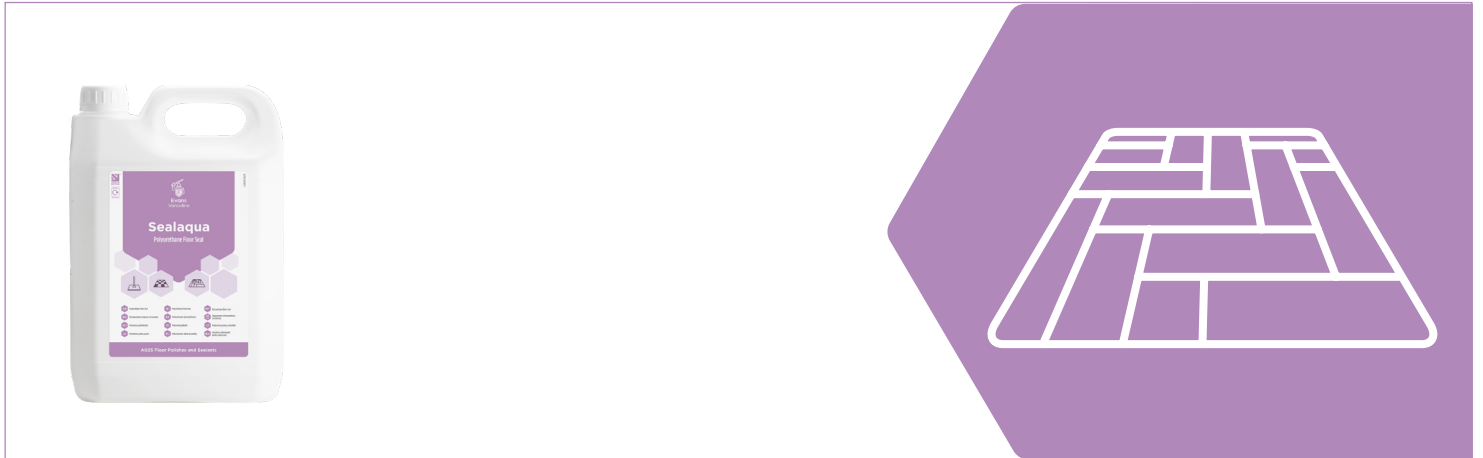

Water based polyurethane and acrylic floor seal for use on internal wood and concrete surfaces.

Provides a protective barrier to make the floor easier to clean and maintain.

Produces a durable, slip-resistant silk finish.

- Quick-drying, which allows a faster application, can be recoated within 2 hours.
- Non-flammable and low odour.
- Suitable for medium traffic areas.
- Coverage per 5 litre - approximately 30 - 40sq. metres for 2 coats.

### FLOOR SEALING:

Ensure floor is clean, dry, wax free and neutral.  
Use undiluted. Apply a thin even coat with a seal applicator or clean, soft brush.  
Allow floor to dry between 1 - 2 hours. Apply a second coat & allow to dry.

If the floor is porous further coats may be necessary.

Drying times can vary depending on ventilation, temperature and humidity.

Sanding in-between coats is not necessary but a light sand with a medium grade floor pad will help key the surface, especially if a third or fourth coat is applied.

After the final coat, leave for a minimum of 12 hours before subjecting to light traffic, and a minimum of 5 days before a maintenance programme is implemented.

5 L

**Order Code: A025EEV2**

Pack: 2 x 5 litre

### PRODUCT INFORMATION:

Appearance:	Opaque white liquid
Odour:	Characteristic
pH - undiluted:	8.5
Shelf life:	3 years

### QUALITY AND ENVIRONMENTAL ASSURANCE:

This product is manufactured in the U.K. by EVANS VANODINE INTERNATIONAL PLC under an ISO 9001 Quality Management System Cert. No. FM 09535 and an ISO 14001 Environmental Management System Cert. No. EMS 506072 registered by the British Standards Institution.

**REVISION DATE:** 12/02/18



Scan here to view safety data information

